


novatec® PREMIUM XP

The new generation
of fibre-reinforced graphite gaskets.

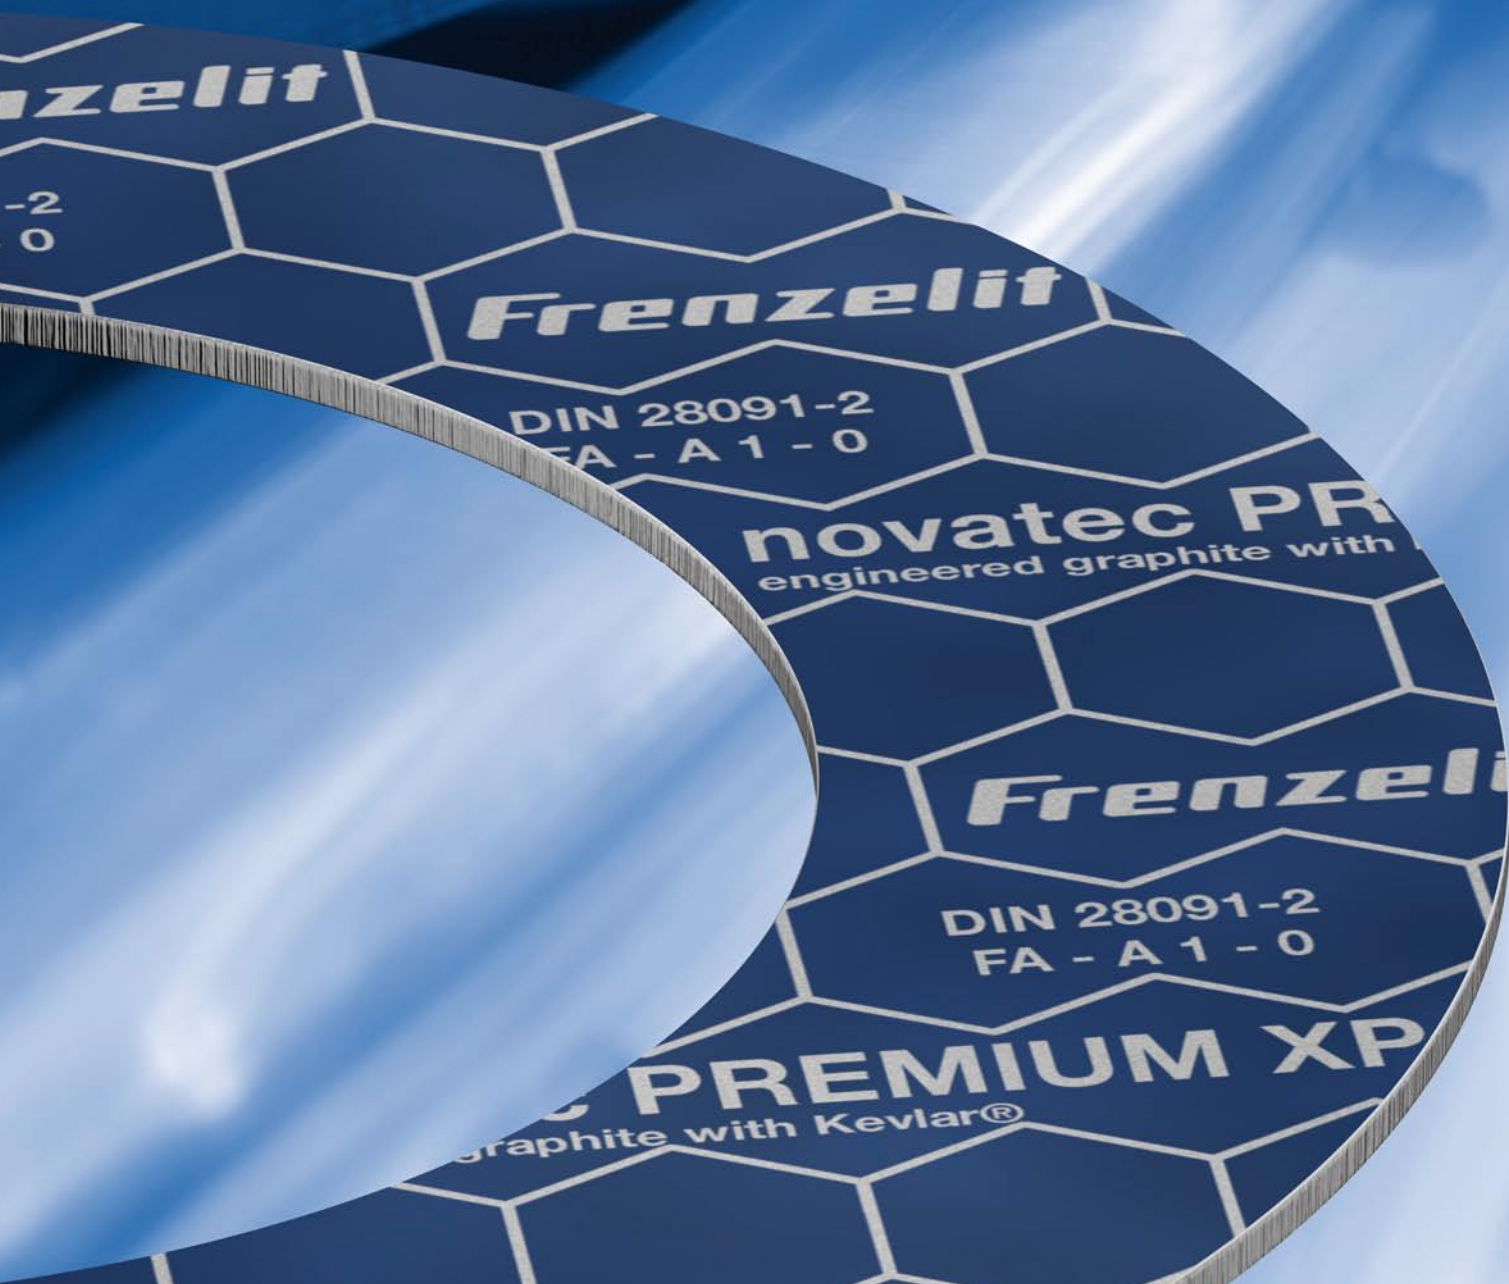

GASKETS

TECHNICAL TEXTILES


EXPANSION JOINTS

INSULATION


NEW MATERIALS

 **Frenzelit**

creating hightech solutions

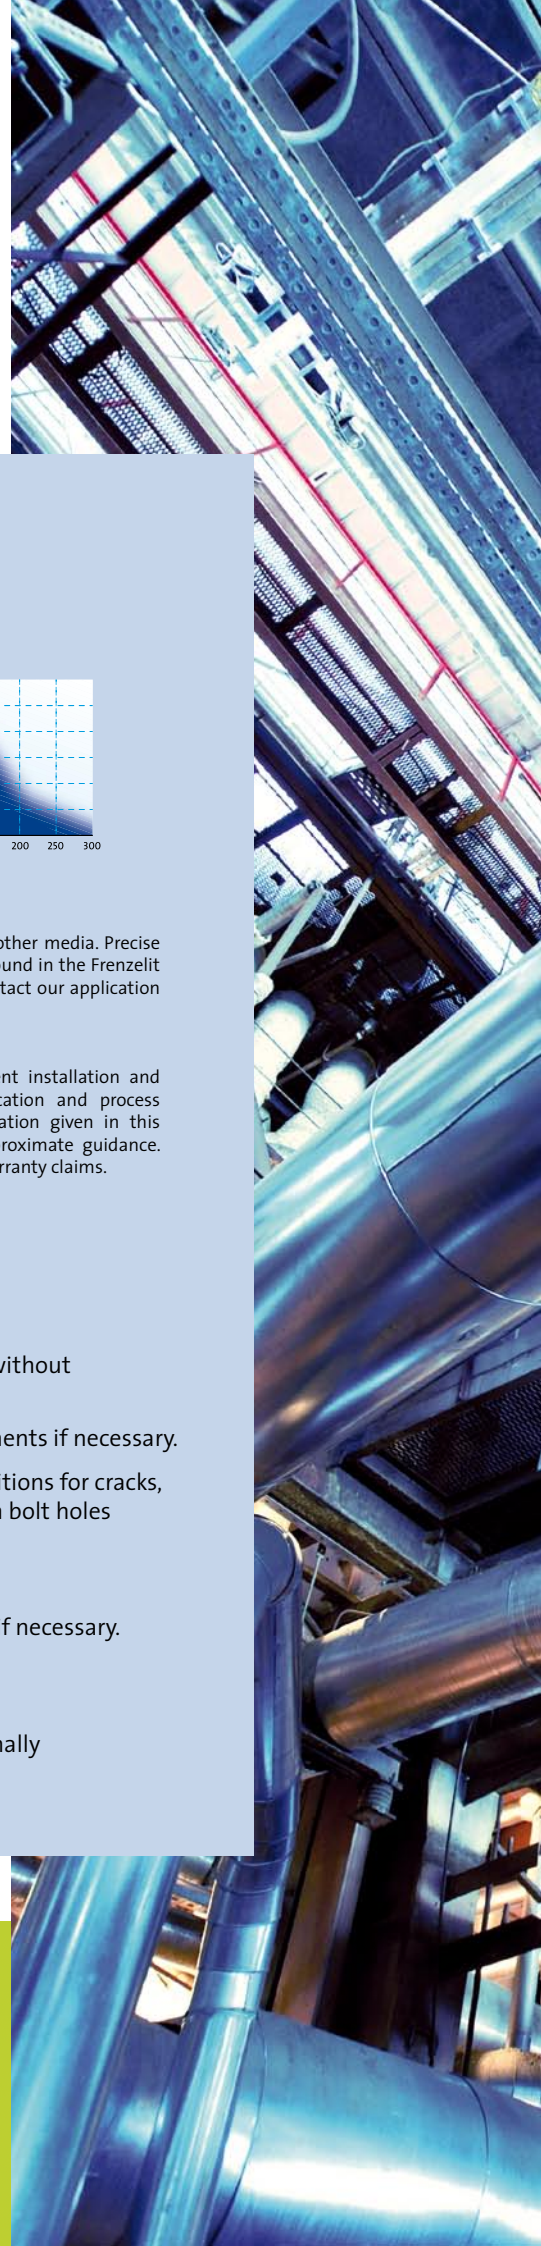


Application recommendations depending on the pressure and temperature

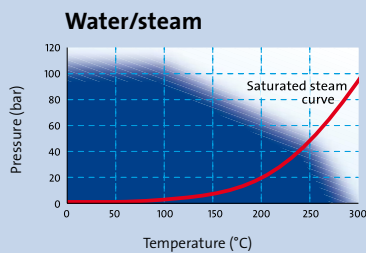

The pressure and temperature limits indicated are influenced to a major extent not only by the characteristics of the material but also by the installation conditions (the surface pressure level in particular). The information provided must therefore be considered an estimate that is on the safe side rather than a fixed application limit.

The application recommendations for different temperature and pressure levels in the graphs apply to a gasket thickness of 2.0 mm and with smooth flanges. Higher limits are possible when thinner gaskets are being used!

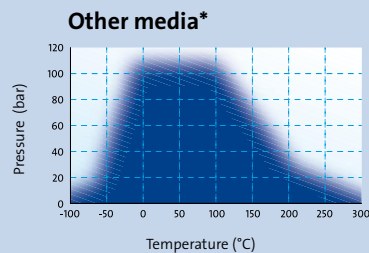

*Example for the most common other media. Precise data for individual cases can be found in the Frenzelit novaDISC program or you can contact our application engineering specialists.

Warranty exclusion

In view of the variety of different installation and operating conditions and application and process engineering options, the information given in this prospectus can only provide approximate guidance. There is as a result no basis for warranty claims.

Installation instructions

- Clean the surfaces that being sealed and remove traces of old gaskets without damaging the flange surface.
- Check the flange surfaces for parallelity and unevenness; make adjustments if necessary.
- Before installing them, check gaskets that have been stored in dry conditions for cracks, surface damage, dimensional accuracy and – in the case of gaskets with bolt holes – congruence of the bolting pattern with the flange.
- Do not use any sealing agents! Fit gaskets dry and grease-free!
- Check the condition of the bolts before fitting them and use new bolts if necessary.
- Install the gaskets consistently and carefully by hand first. (Attention: never tighten the first bolt too securely!).
- Tighten the bolts with a suitable tool. Apply the specified torque diagonally in several stages.


Gasket parameters according to DIN EN 13555:
Available to be downloaded from

www.frenzelit.com/novatecPREMIUMXP-e




novatec® PREMIUM XP – the high-performance all-rounder

novatec® PREMIUM XP is the new and more efficient “Extended Performance” (XP) generation of graphite gaskets reinforced with aramid fibres that have been developed by Frenzelit. A considerable reduction in leakage and at the same time, excellent residual stress and chemical resistance levels are achieved thanks to careful graphite structural design and ingenious process engineering. With novatec® PREMIUM XP it is possible to configure gasket systems in accordance with DIN EN 1591-1 with the sealing category L_{0,01} as outlined in VDI 2290. In this context, the unique combination of aramid fibres and graphite makes it possible to standardise gaskets far beyond the existing options with elastomer-bonded fibre gaskets for a wide range of different applications up to a maximum of 300°C.

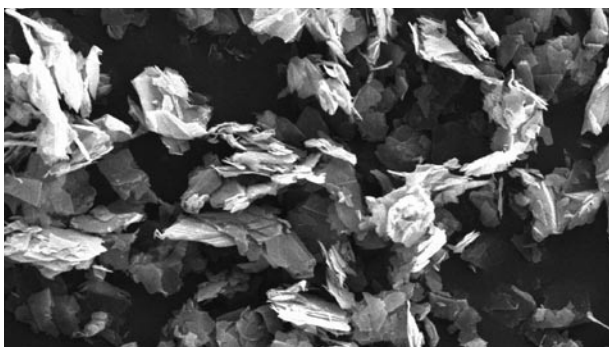

The morphology is what makes the difference

Graphite is not a uniform material. Its sealing properties are influenced to a major extent not only by the degree of purity and the particle size but also by the structure of the graphite. Thanks to careful morphological design, the “Extended Performance” generation of novatec® PREMIUM XP reaches a new level of sealing quality and makes it possible to create seals that satisfy the strict requirements specified by the German “TA Luft” air pollution regulations and VDI 2290. The photos show two special graphite structures that act as the basic material for novatec® PREMIUM XP

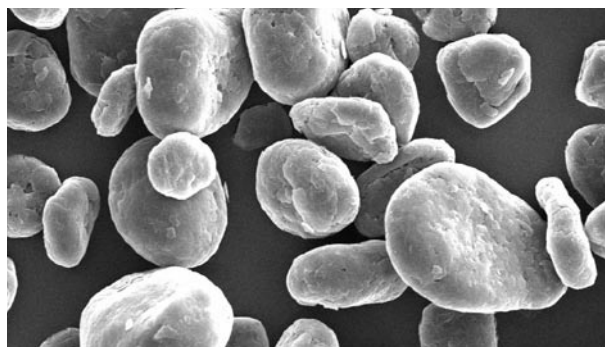

Media-resistant at high temperatures

The graphite – Kevlar® material combination guarantees efficiency that exceeds all standard flexible fibre materials (FA). The high graphite content combined with the low bonding agent content leads to substantially higher chemical resistance levels. The application temperature range is increased to up to 300°C at the same time. The residual stress level is better than anything achieved with conventional FA gaskets. The non-stick coating that remains effective for a long period of time is an additional advantage.


Kevlar® is a DuPont registered trademark.

Characteristic data – quantifiable application benefits

The advantages at a glance:


- Considerable reduction in leakage thanks to optimised graphite morphology
- Compliance with German air pollution regulations (“TA Luft”) and with VDI 2290 gasket system design specifications
- Excellent residual stress
- Extended temperature range up to 300°C
- High media resistance
- Anti-stick coating that remains effective for a long period of time
- Simple processing / handling

Leakage rate under the influence of temperature

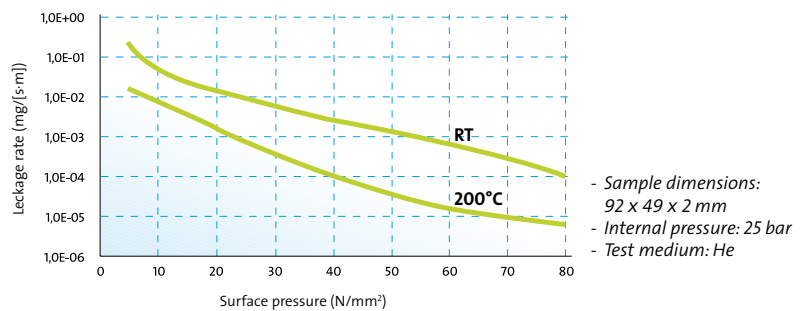


novatec® PREMIUM XP is designed for minimum leakage. The microporosity of the innovative gasket material decreases under the influence of temperature and surface pressure.

Leakage properties (thickness 2.0 mm)

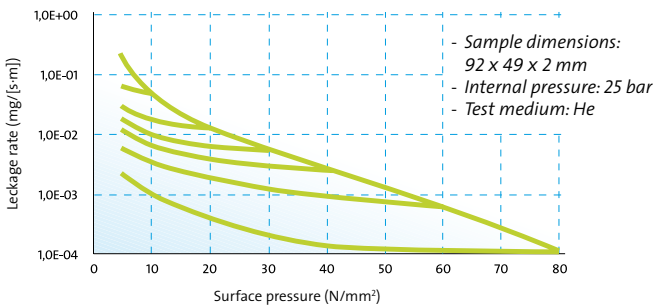

The new generation of novatec® PREMIUM XP demonstrates considerably less leakage at the standard surface pressure levels.

Compression set – Temp-Test (thickness 2.0 mm)

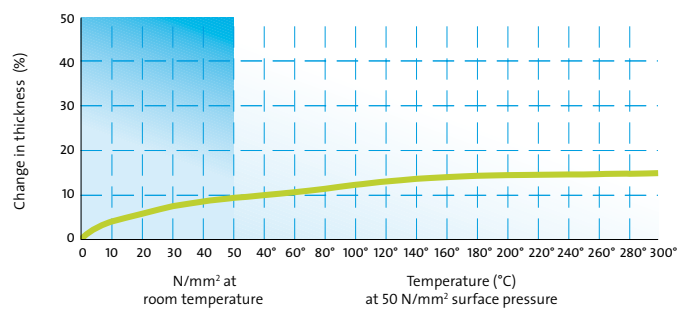

The thickness of novatec® PREMIUM XP decreases to a particularly small extent under the influence of temperature. At 300°C, thickness is only 5 % lower than at room temperature.



General material data	
Components	Graphite, aramid fibre, NBR
Approvals	DVGW, KTW, WRAS, W 270, VP 401, Germanisches Lloyd, BAM (max. 110°C/130 bar), TA Luft, SVGW, EC No. 1935/2004
Identification colour	Royal blue
Anti-stick coating	A 310 on both sides
Dimensional and thickness tolerances	According to DIN 28 091-1

Physical properties	Standard	Unity	Value*
Gasket thickness 2.0 mm			
Identification	DIN 28 091-2		FA - A 1 - O
Density	DIN 28 090-2	[g/cm ³]	1.74
Tensile strength	DIN 52 910		
longitudinal		[N/mm ²]	20
transverse		[N/mm ²]	18
Residual stress $\sigma_{de/16}$	DIN 52 913		
175 °C		[N/mm ²]	37
300 °C		[N/mm ²]	30
Compressibility	ASTM F 36 J	[%]	6
Recovery	ASTM F 36 J	[%]	60
Cold compressibility ϵ_{KSW}	DIN 28 090-2	[%]	6
Cold recovery ϵ_{KRW}	DIN 28 090-2	[%]	3
Hot creep $\epsilon_{WSW/200}$	DIN 28 090-2	[%]	8
Hot recovery $\epsilon_{WRW/200}$	DIN 28 090-2	[%]	2
Recovery R	DIN 28 090-2	[mm]	0.04
Specific leakage rate	DIN 3535-6	[mg/(s·m)]	≤ 0.05
Specific leakage rate $\lambda_{2,0}$	DIN 28 090-2	[mg/(s·m)]	≤ 0.05
Fluid resistance	ASTM F 146		
ASTM IRM903	5h/150 °C		
Weight change		[%]	8
Thickness increase		[%]	5
ASTM Fuel B	5h/23 °C		
Weight change		[%]	8
Thickness increase		[%]	5
Chloride content	FZT PV-001-133	[ppm]	≤ 50

* Modal value (typical value)

Product data

Dimensions [mm]	1500 x 1500	2000 x 1500
Thicknesses [mm]	0.5/0.8	1.0/1.5/2.0/3.0
Further dimensions and thicknesses are available on request		

If you have any application engineering questions, we will be delighted to answer them. Just contact:

gaskets@frenzelit.de



Good for people and the environment.

From research and development to our manufacturing operations and use of the product by the customer: quality assurance and a responsible approach to resources and the environment are a firm commitment we observe in everything we do throughout the life cycle of all products.

Frenzelit has obtained certification that the company complies with the requirements of ISO 9001, ISO/TS 16949 and ISO 14001. This means complete transparency in all areas and therefore provides a high degree of security – for the benefit of our employees, the environment and our customers.

Qualitätsmanagement

ISO 9001

ISO/TS 16949

Umweltmanagement

ISO 14001

Gasket materials from Frenzelit:

novapress®
Compressed fibre gaskets





novaform®
Special compressed fibre gaskets, metal, dispenser or silk screen gaskets




novatec®
Fibre-reinforced graphite gaskets



novaphit®
Graphite gaskets from expanded pure graphite / reinforced with stainless steel inserts



novaflo®
PTFE gaskets



novaMICA®
High-temperature gaskets made from phlogopite mica with an expanded stainless steel metal insert



isoplan®
High-temperature gaskets and insulation material



novaplan®
Facing material for cylinder head gaskets, head shield papers

GASKETS

TECHNICAL TEXTILES

EXPANSION JOINTS

INSULATION

NEW MATERIALS

Frenzelit Werke GmbH
P.O.Box 11 40
95456 Bad Berneck
Germany
Phone +49 9273 72-0
Fax +49 9273 72-221
info@frenzelit.de
www.frenzelit.com

 **Frenzelit**
creating hightech solutions